

# TETRA-CHEM INDUSTRIES LTD.



SPECIALTY CHEMISTRY • INNOVATIVE ENGINEERING  
APPLICATION TECHNOLOGY • WASTE MANAGEMENT SYSTEMS

71 JOHN ST. E., BRIGHT, ON CANADA NOJ 1B0

TEL: (519) 454-4370 (888) 658-5515 FAX: (519) 454-4362  
WEB SITE: [www.tetra-chem.com](http://www.tetra-chem.com) EMAIL: [info@tetra-chem.com](mailto:info@tetra-chem.com)

Check out our Web Site !  
[www.tetra-chem.com](http://www.tetra-chem.com)

## PRODUCT APPLICATION PRESENTATION

**TCI 1208 H.D.<sup>TM</sup>**

**HOT HI PRESSURE CLEANER/CORROSION INHIBITOR**

### PRODUCT IDENTIFIER:

### PROCESS IDENTIFIER:

#### PRODUCT PRESENTATION

**TCI 1208 H.D. HOT WATER HIGH PRESSURE CLEANER/CORROSION INHIBITOR** is a safe, environmentally friendly and biodegradable concentrated liquid formulation that passifies ferrous metal against stress corrosion and atmospheric oxidation.

**PACKAGING: 25, 205 LITRES**

#### PROCESS SPECIFICITY

This package product is designed to remove grinding, stamping and cutting fluids from polished or otherwise unprotected steel and painted surfaces and acts as a rinse agent to remove all residual acid after the steam phosphating process to prevent flush rusting prior to painting.


The prescribed **100:1** concentration of **TCI 1208 H.D.** is fast, efficient and versatile for all cleaning jobs. The process can be implemented for the exterior cleaning of all types of painted surfaces, chrome, ferrous and non-ferrous metals (steel and copper), white metals (aluminum and magnesium) and accessories not affected by water on daily or weekly maintenance schedules.

#### PROCESS INTRODUCTION

**TCI 1208 H.D.** is designed for exterior and interior washing when applied with the **MANUFACTURER'S** approved **CHEMICAL APPLICATOR SYSTEM** and sprayed as a high pressure combination directly from the water supply chemical mixing tank reservoir onto the surface to be cleaned. The preportioned solution breaks the soil matrix quickly without brushing.

**TCI 1208 H.D.** is designed for hot water (60 °C) high pressure wash systems for quick drying. Guarded against hot water scale precipitation to 400 ppm. Using the integral proportioner, meter the concentrate to a dilution of 1/2 - 1%.

**This is a final rinse and must NOT be rinsed again with raw water.**

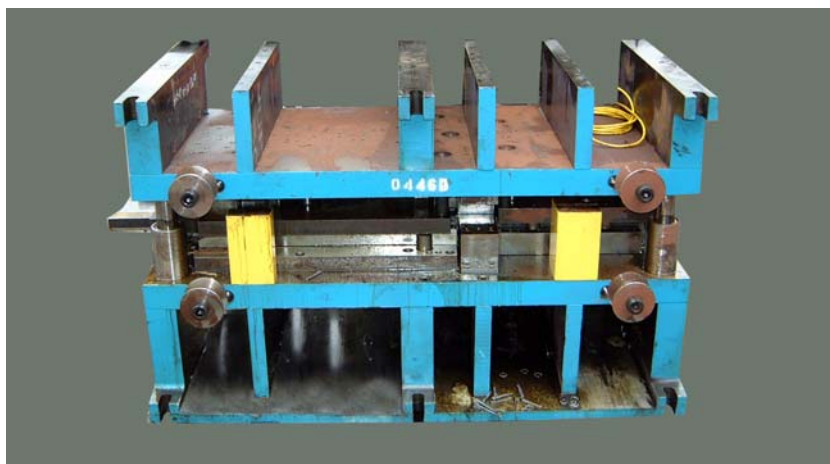

**METAL STAMPING INDUSTRY - DIE CLEANING**

PLEASE CALL OUR **TECHNICAL SUPPORT LINE @ 1-888-658-5515** FOR SOLUTIONS TO YOUR INDUSTRY.  
FOR INDUSTRIAL AND INSTITUTIONAL USE ONLY

THE INFORMATION GIVEN HEREIN IS GIVEN IN GOOD FAITH BUT NO WARRANTY, EXPRESSED OR IMPLIED IS MADE